

TUNNELLER

VARIATIONS


4 lengths available in standard or rigid version



S - 300 mm

M - 450 mm

L - 600 mm

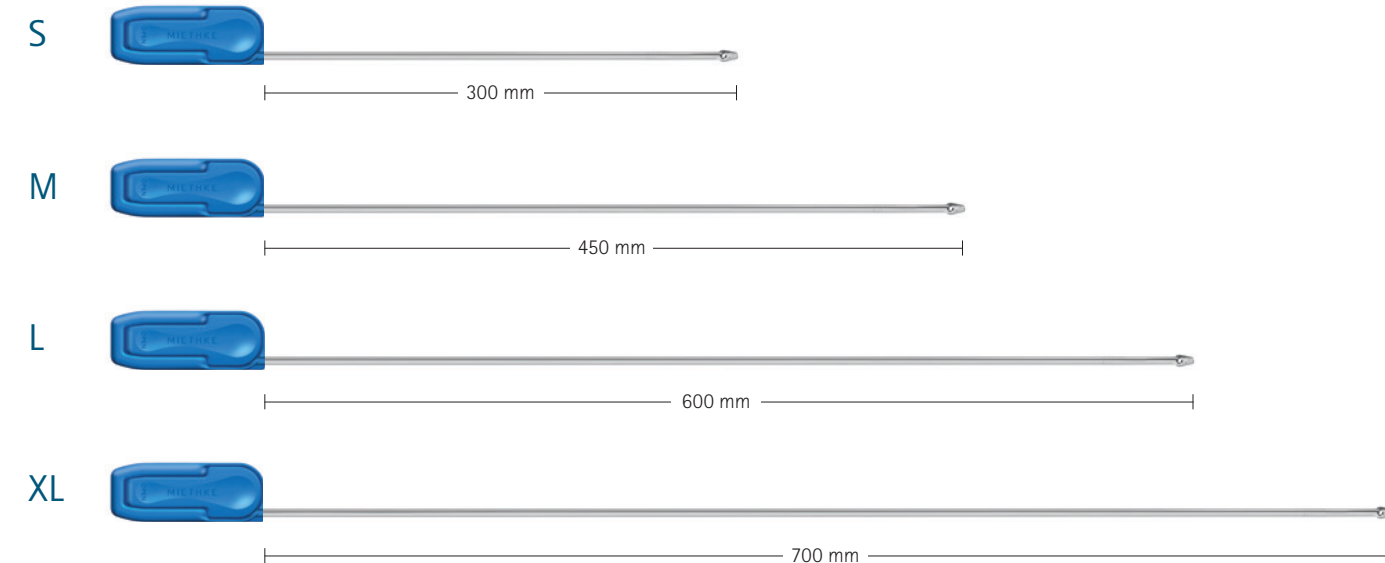XL - 700 mm



	300 mm	450 mm	600 mm	700 mm
 STANDARD VERSION (with ring marking)	FX005SU	FX006SU	FX007SU	FX008SU
 RIGID VERSION (no ring marking)	FX001SU	FX002SU	FX003SU	FX004SU

Distributed by
Aesculap AG | Am Aesculap-Platz | 78532 Tuttlingen | Germany
Phone +49 7461 95-0 | Fax +49 7461 95-2600 | www.aesculap.com


AESCULAP® – a B. Braun brand

Manufacturer acc. to MDD 93/42/EEC
Christoph Miethke GmbH & Co. KG | Ulanenweg 2 | 14469 Potsdam | Germany
Phone +49 331 62083-0 | Fax +49 331 62083-40 | www.miethke.com

CE 0297

The product trademarks "Miethke" is a registered trademark of Miethke GmbH & Co. KG.
The main product trademark "Aesculap" is a registered trademark of Aesculap AG.

Subject to technical changes. All rights reserved. This brochure may only be used for the exclusive purpose of obtaining information about our products. Reproduction in any form partial or otherwise is not permitted.

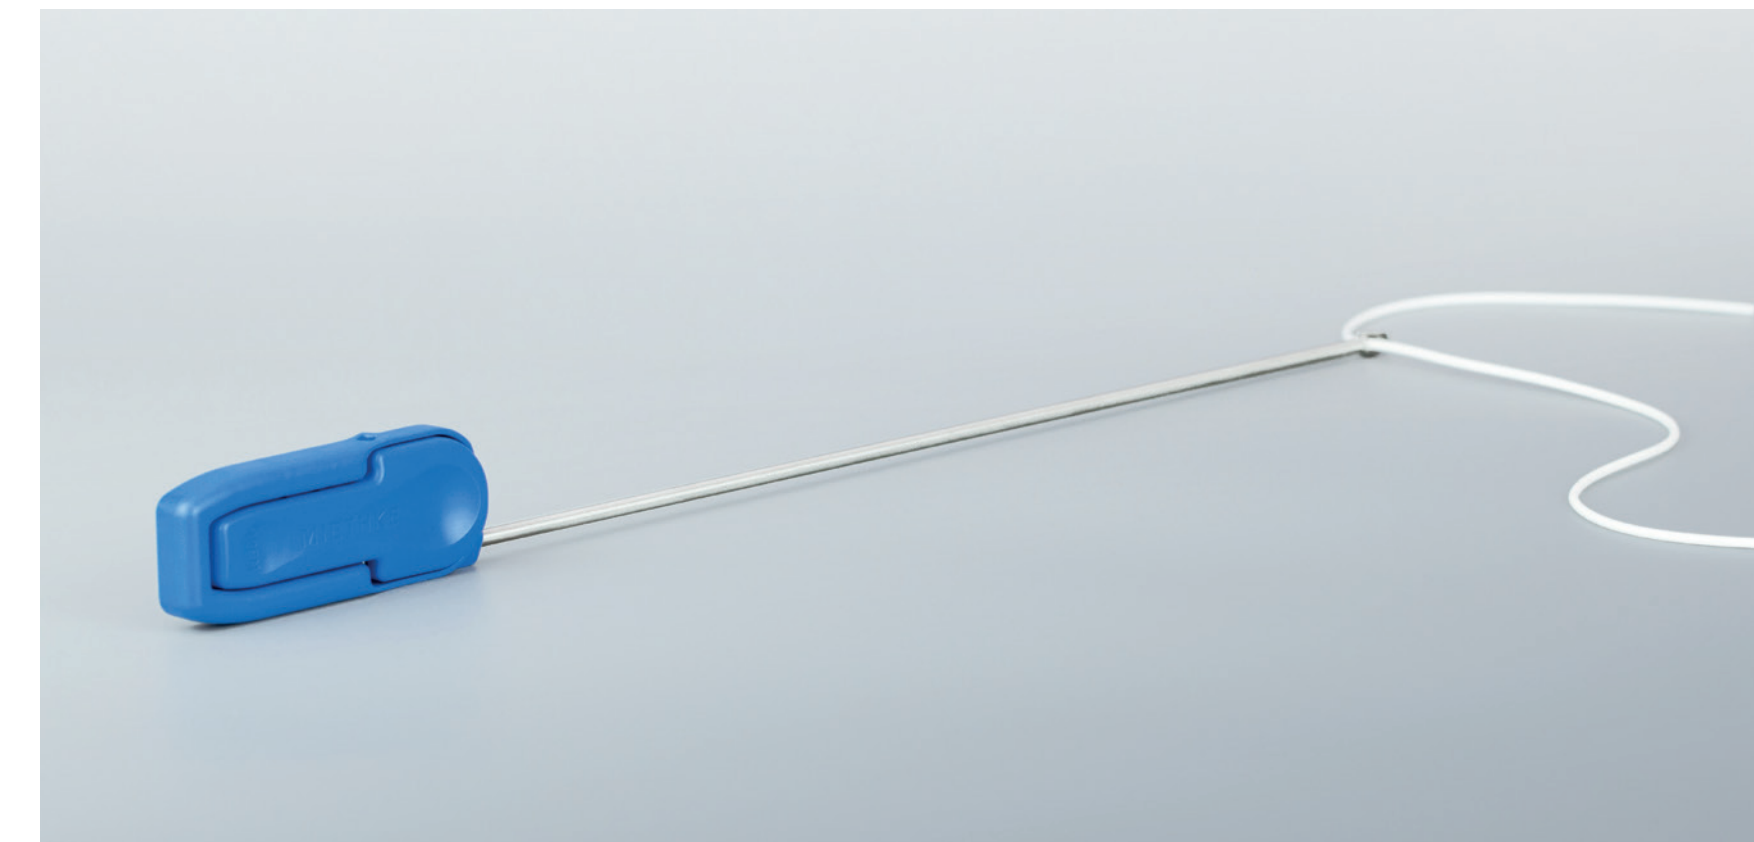

NEUROSURGERY

TUNNELLER


A NEW FLEXIBILITY IN SHUNT SURGERY
YOU DEFINE THE PATH

TUNNELLER

CATHETER TUNNELLING INSTRUMENT

- Tunnelling instrument in eight variants for individual surgical requirements
- Handle customizable to personal preference
- Each tunneller has a blunt and a sharp tip, which makes it adaptable to the tissue at hand
- Designed for easy and fast (direct) catheter placement
- Bi-directional approach possible: paraumbilical → retroauricular
retroauricular → paraumbilical


HANDLING OPTIONS

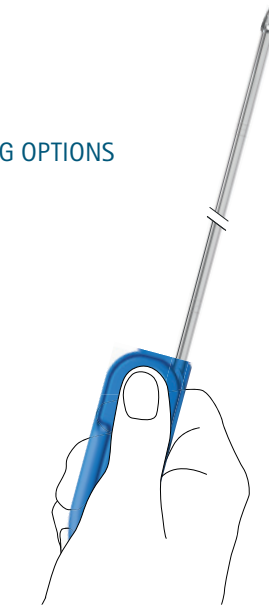


Step 1 - Longitudinal alignment



Step 2 - Press lever and remove shaft

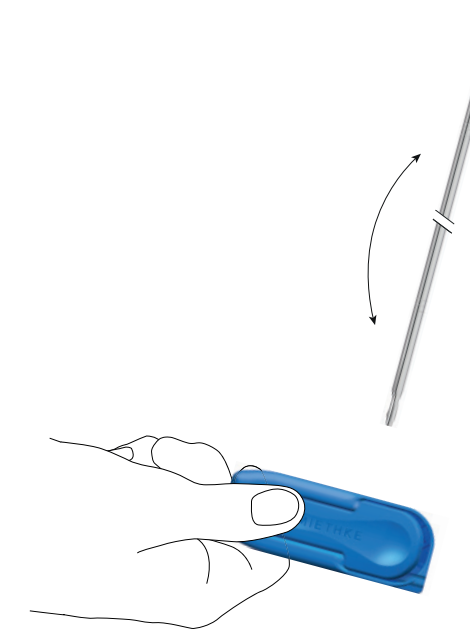


Step 3 - Choose appropriate tip design and handle alignment (here lateral)

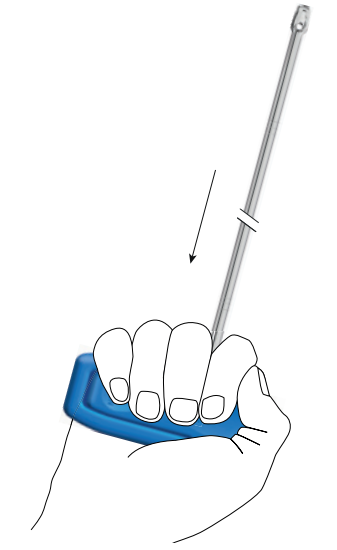


Step 4 - Close upper handle part to lock shaft

TUNNELLING SHAFT


- 2 options: standard and rigid
- Sharp and blunt tip
- Shaft tip can be selected intraoperatively
- Shaft easily shapable
- Solid material without buckling behaviour
- Single piece rod design - no random components
- Opening for catheter insertion for direct loading
- Flattened tip design for controlled advancement
- 4 lengths: 300, 450, 600, 700 mm




SHARP TIP: designed for solid tissue / fascia



Standard version with ring marking



BLUNT TIP: designed for soft tissue



Rigid version without ring marking

HANDLE

- 2 options: longitudinal and lateral alignment
- No unintentional loosening due to lock mechanism
- Feedback at correct adjustment
- Ergonomic design



Original size 1:1

